


MT3(B,Q)C Series Extra High Efficiency Heat Pumps 12 SEER System 1-1/2 – 5 Ton Capacity


The MT3(B,Q)C Series of heat pumps offers exceptional performance from a small, compact package. The heat pump, when combined with our engineered coils, offer a full line of quality, split system heating and cooling equipment.

FEATURES and BENEFITS

- **Durable, Attractive Cabinet** – Designed using galvanized steel with a polyester urethane finish. The 950 hour salt spray finish is 1.5 mil thick and resists corrosion 50% better than comparable units.
- **Copper Tube / Aluminum Fin Coils** – Both indoor and outdoor coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Permanently Lubricated Motor** – A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Full Service Valves** – These brass valves are easily accessible and simplify servicing of the refrigeration system. Quick connect models also available.
- **Plastic Mesh Hail Guard** – A guard that will never rust and protects the units coil from being damaged by balls, lawnmowers, hail, etc.
- **Time/Temperature Defrost** – A reliable, industry standard control offers various time settings to meet any type climate.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Common Suction Service Port** – This port allows the contractor to read the suction pressure in all modes of operation without removing any panels, saving time and increasing serviceability.
- **2-1/2" Pedestal Base** – The sturdy base keeps the bottom of the coil out of harms way. Secondly, the base has weep holes along the edge to allow the water from the defrosting coil and rain to flow away from the unit.
- **Five Minute Restart Time Delay** – When the unit shuts down, a five minute delay keeps the unit from restarting, eliminating the highest cause for compressor failure.
- **Suction Accumulator** – Protection from liquid flood back and future compressor failures. All 12 seer H.P. have scroll compressors.
- **Hot Gas Muffler** – Reduces compressor noise and vibration.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Outdoor Thermostat -913235** – Two stage logic provides ability to lock out electric strips down to balance point. Factory installed on quick connect models.
- **1 Year Limited All Parts Warranty/10 Year Compressor Warranty** – Has proven to be a major benefit to the consumer.

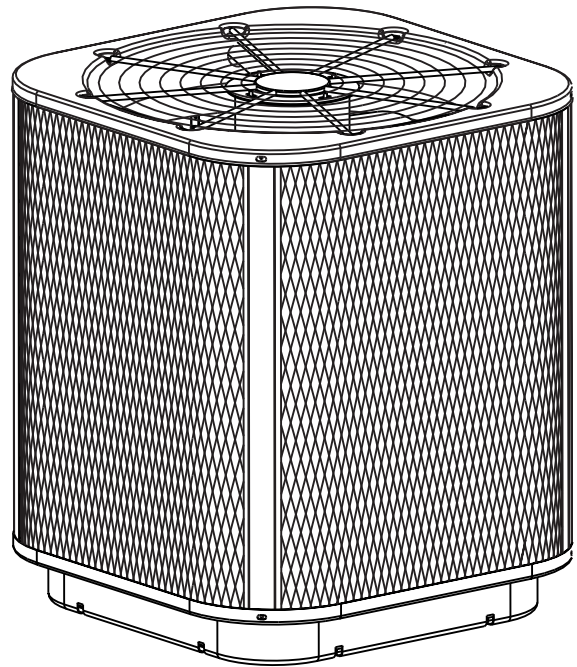


MODEL IDENTIFICATION CODES

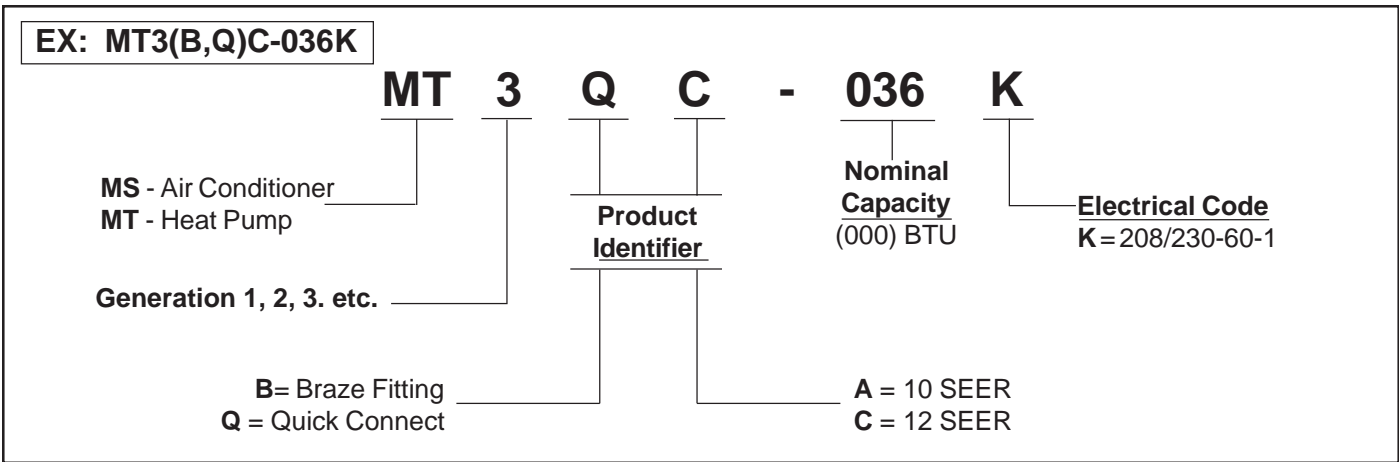

DIMENSIONS HEAT PUMP OUTDOOR SECTION

Capacity	018*	024	030	036	042	048	060*
H	26 1/2	30 1/2	34 1/2	38 1/2	42 1/2	38 1/2	42 1/2
W	30 1/2	30 1/2	30 1/2	30 1/2	30 1/2	30 1/2	30 1/2
D	30 1/2	30 1/2	30 1/2	30 1/2	30 1/2	30 1/2	30 1/2

* Braze only (1.5 & 5 TON)

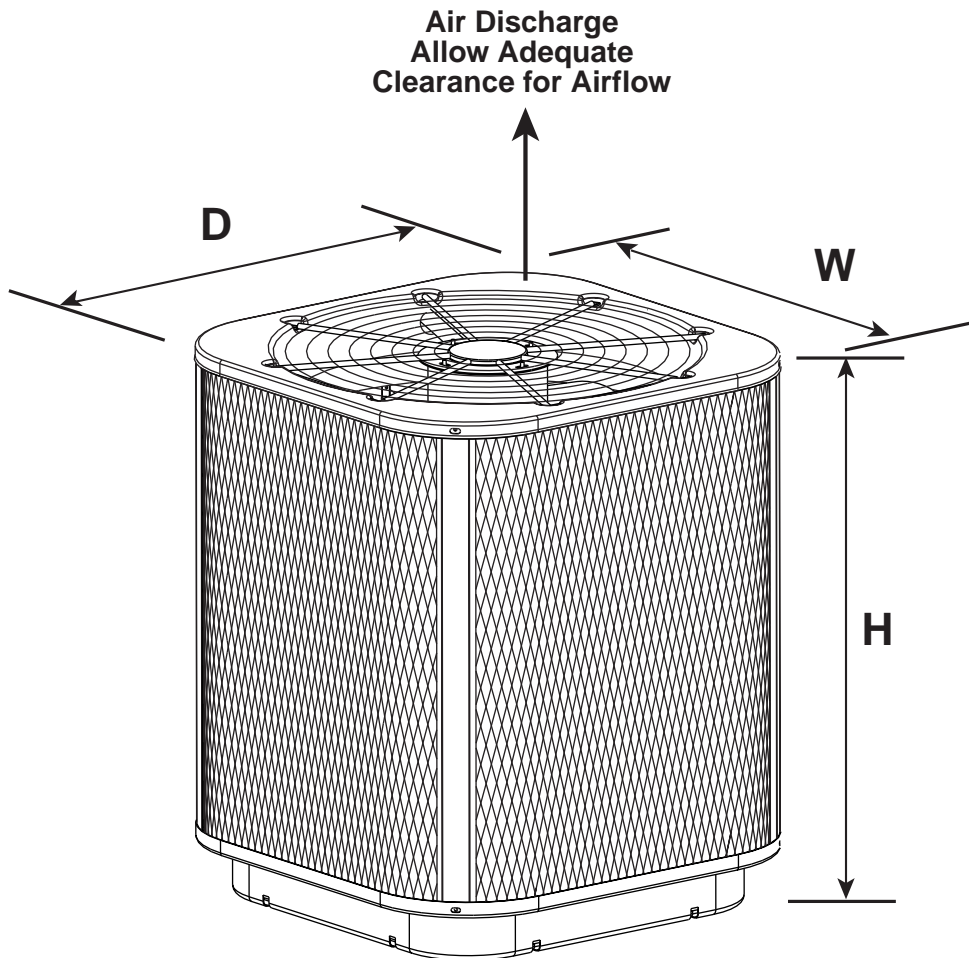

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

12 SEER — High Efficiency — Single Phase

Model No. MT3(B,Q)C-		018K	024K	030K	036K	042K	048K	060K	
Electrical	Volts-Cycles-Phase (1)	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	
Data	Total Amps	9.7	11.6	13.6	17.4	19.4	20.7	30.3	
	Delay Fuse Max. (2)	20	20	25	35	40	40	60	
	Min. Circuit Ampacity	11.8	14.2	16.6	21.4	23.9	25.5	37.5	
Component Data	Coil	Area	15.3	17.9	20.4	23.0	25.5	23.0	25.5
		Rows-FPI	1-18	1-18	1-18	1-20	1-20	2-16	2-16
		Tube Dia.	3/8 O.D.	3/8 O.D.	3/8 O.D.	3/8 O.D.	3/8 O.D.	3/8 O.D.	3/8 O.D.
	Fan Motor	Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC
		Amps	1.4	1.4	1.4	1.4	1.5	1.5	1.5
		Watts-HP	245	245	245	245	300	300	300
	Fan Blade	Dia.-#Blades	24 in. - 3	24 in. - 3	24 in. - 3	24 in. - 3	24 in. - 3	24 in. - 3	24 in. - 3
		SCFM	3300	3300	3300	3300	4000	4000	4000
	Compressor Data*	RLA	8.3	10.2	12.2	16.0	17.9	19.2	28.8
		LRA	47	56	67	88	104	137	169
Refrigerant Suction Line- Length/O.D. (Liq. Line All Lengths - 3/8" O.D.)	15 - 24 ft.	5/8" (3)	5/8" (3)	3/4"	3/4"	3/4"	7/8"	7/8"	
	25 - 39 ft.	3/4"	3/4"	3/4"	3/4"	7/8" (4)	7/8"	1 1/8" (5)	
	40 - 75 ft.	3/4"	3/4"	3/4"	7/8" (4)	7/8" (4)	7/8"	1 1/8" (5)	
Refrigerant Charge (Outdoor unit, Indoor Unit, 15' Line Set)	R-22 Ounces	107	112	133	146	162	240	264	
Weight	Net	162	170	178	188	204	253	282	
	Approximate (lbs.) Ship	174	182	190	200	216	265	294	

* Values shown are most severe and may vary slightly depending on the make of the compressor supplied.

- (1) Operating Voltage Range: 198v min. — 253v max.
- (2) HACR Type Circuit Breakers may be used.
- (3) Requires 3/4" to 5/8" reducer from unit to line.
- (4) Requires 7/8" to 3/4" reducer from unit to line.
- (5) Requires 7/8" to 1 1/8" reducer from unit to line.

ACCESSORIES - Condensing Unit

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Snow Stand

Plastic-coated, molded wire stand which elevates units 7-1/4" above ground level.

913145 - (018 through 060) Shipped six (6) per box.

Time Delay Kit (TDR) - 911758

Liquid Line Solenoid Kit (LLS) - 912650

COPPER WIRE SIZE — AWG				
(1% Voltage Drop)				
Supply Wire Length-Feet				Supply Circuit
200	150	100	50	Ampacity
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.

SYSTEM HEATING & COOLING CAPACITIES

12 SEER — Extra High Efficiency — Single Phase

Outdoor Unit		Indoor Unit						
Model Number MT3(B,Q)C-	Model Number C3(Q,D,B)A	Cooling Btuh	SEER	Heating Btuh@47°	Heating Btuh@17°	HSPF	Nominal SCFM	Required Indoor Orifice
018K	036(C,U)-A (2)	18,200	12.0	18,000	9,800	7.1	675	.057 (1)
024K	036(C,U)-A (2)	24,000	12.0	22,400	12,800	7.2	700	.065 (1)
030K	036(C,U)-A+TDR (2)	28,600	12.0	28,400	16,200	7.6	900	.067
030K	036(C,U)-B+TDR (2)	28,600	12.0	28,400	16,200	7.6	900	.067
042K	048(C,U)-B+TDR (2)	40,500	12.0	40,500	23,100	7.6	1300	.085 (1)
048K	060(C,U)-C (2)	48,000	12.0	48,000	27,400	7.6	1600	.093
060K	060(C,U)-C+TDR (2)	57,000	12.0	57,000	32,800	7.6	1700	.099 (1)

(1) Field supplied

See current ARI Directory for certified combinations and ratings.

Outdoor Unit		Indoor Unit						
Model Number MT3(B,Q)C-	Model Number C3BA-	Cooling Btuh	SEER	Heating Btuh@47°	Heating Btuh@17°	HSPF	Nominal SCFM	Required Indoor Orifice
024K	030(C,U)-B	24,000	12.0	22,400	12,800	7.2	700	.065 (1)
036K	042(C,U)-B	34,600	12.0	34,600	19,700	7.6	1100	.077 (1)
042K	048(C,U)-C+TDR	40,500	12.0	40,000	23,100	7.6	1300	.085 (1)

Outdoor Unit		Indoor Unit						
Model Number MT3(B,Q)C-	Model Number GB3B(M,V)-	Cooling Btuh	SEER	Heating Btuh@47°	Heating Btuh@17°	HSPF	Nominal SCFM	Required Indoor Orifice
018K	030K-AB	18,200	12.0	17,600	9,800	7.0	675	.057 (1)
024K	030K-AB	24,000	12.0	22,400	12,800	7.2	700	.065 (1)
024K	030K-BB	24,000	12.0	22,400	12,800	7.2	700	.065 (1)
030K	030K-AB+TDR	28,600	12.0	28,400	16,200	7.6	900	.067 (1)
030K	036K-BB+TDR	28,600	12.0	28,400	16,200	7.6	900	.067
036K	042K-BB	34,600	12.0	34,600	19,700	7.6	1100	.077 (1)
042K	048K-BB+TDR	40,500	12.0	40,500	23,100	7.6	1300	.085 (1)
048K	060K-CB	48,000	12.0	48,000	27,400	7.6	1600	.093
060K	060K-CB+TDR	57,500	12.0	58,000	33,100	7.6	1800	.099 (1)

Model Number MT3(B,Q)C-	Model Number C3BA-	Cooling Capacity (Btu/h)	SEER Rating	Heating Capacity (Btu/h)@47°	HSPF	Heating Capacity (Btu/h)@17°	Nominal Airflow	Indoor Orifice Size (in)
024K	036(C,U)-B+TDR+LLS	24,200	13.0	22,600	7.3	13,000	700	.065 (1)
024K	030(C,U)-B+VSB	24,200	13.0	22,000	7.8	12,500	720	.065 (1)
030K	042(C,U)-B+TDR+LLS	28,800	13.0	28,600	7.7	16,300	900	.067 (1)
030K	036(C,U)-B+VSB	28,800	13.0	28,000	8.0	15,900	990	.067
036K	042(C,U)-B+LLS+VSB	35,000	13.0	34,400	8.0	20,000	1100	.077 (1)
042K	048(C,U)-(B,C)+LLS+VSB	41,500	13.0	41,000	8.0	23,400	1305	.085 (1)
048K	060(C,U)-C+VSB	48,000	13.0	47,500	8.0	27,000	1530	.093

Model Number MT3(B,Q)C-	Model Number GB3B(V,M) + VSB	Cooling Capacity (Btu/h)	SEER Rating	Heating Capacity (Btu/h)@47°	HSPF	Heating Capacity (Btu/h)@17°	Nominal Airflow	Indoor Orifice Size (in)
024K	036K-BB	24,600	13.0	22,200	7.7	12,500	720	.065 (1)
030K	036K-BB	29,000	13.0	28,000	7.7	14,600	885	.067
036K	048K-BB+LLS	35,000	13.0	34,400	8.0	20,000	1100	.077 (1)
042K	048K-BB	41,000	13.0	39,500	7.9	19,700	1315	.085 (1)
048K	060K-CB	48,000	13.0	48,000	7.6	27,400	1600	.093

See the current ARI Directory for certified combinations and ratings.

(1) Field supplied.

(2) Available as C3BH multi-position

LLS = Liquid Line Solenoid

TDR =Time Delay Relay

VSB = Variable Speed Blower



We Encourage Professionalism



Through Technician Certification by NATE

