




TECHNICAL SPECIFICATIONS

Model DT3BC Series

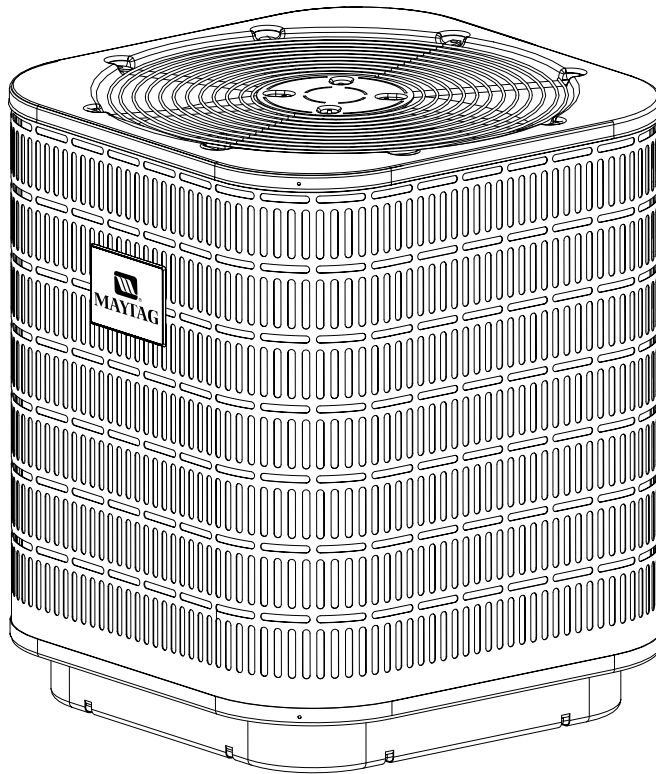

M1000 Product Line

**Extra High Efficiency Heat Pump
12 SEER — 1 1/2 - 5 Ton Capacity**

- **10 YEAR
WARRANTY**
- **WORRY-FREE
PERFORMANCE**



The DT3BC Series of heat pumps offers exceptional performance from a small, compact package. The heat pump, when combined with our engineered coils or air handlers, offers a full line of quality, split system heating and cooling equipment. Units are ideally sized for slab or rooftop mounting.


Features and Benefits

- **Durable, Attractive Cabinet** – Designed using galvanized steel with a polyester urethane finish. The 950 hour salt spray finish resists corrosion 50% better than comparable units.
- **Copper Tube / Aluminum Fin Coils** – Outdoor coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Permanently Lubricated Motor** – A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Full Service Valves** – These brass valves are easily accessible and simplify servicing of the refrigeration system.
- **Steel Guard™** – protects the unit coil from being damaged by balls, lawnmowers, hail, etc.
- **Time / Temperature Defrost** – A reliable, industry standard control offers various time settings to meet any type climate.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Common Suction Service Port** – This port allows the contractor to read the suction pressure in all modes of operation without removing any panels, saving time and increasing serviceability.
- **2-1/2" Pedestal Base** – The sturdy base keeps the bottom of the coil out of harms way. Secondly, the base has weep holes along the edge to allow the water from rain to flow away from the unit.
- **Five Minute Restart Time Delay** – When the unit shuts down, a five minute delay keeps the unit from restarting, eliminating the highest cause for compressor failure.
- **Suction Accumulator and Crankcase Heat** – Protection from liquid flood back and future compressor failures.
- **Hot Gas Muffler** – Reduces compressor noise and vibration.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **10 Year Limited Parts Warranty** – The best in the industry and has proven to be a major benefit to the consumer.

DIMENSIONS/OUTDOOR SECTION

DT3BC-	018KA	024K	030K	036K	042K	048K	060K
H	26 1/2	30 1/2	34 1/2	38 1/2	42 1/2	38 1/2	42 1/2
W	22 1/2	30 1/2	30 1/2	30 1/2	30 1/2	30 1/2	30 1/2
D	22 1/2	30 1/2	30 1/2	30 1/2	30 1/2	30 1/2	30 1/2

Air Discharge
Allow Adequate Clearance for Airflow

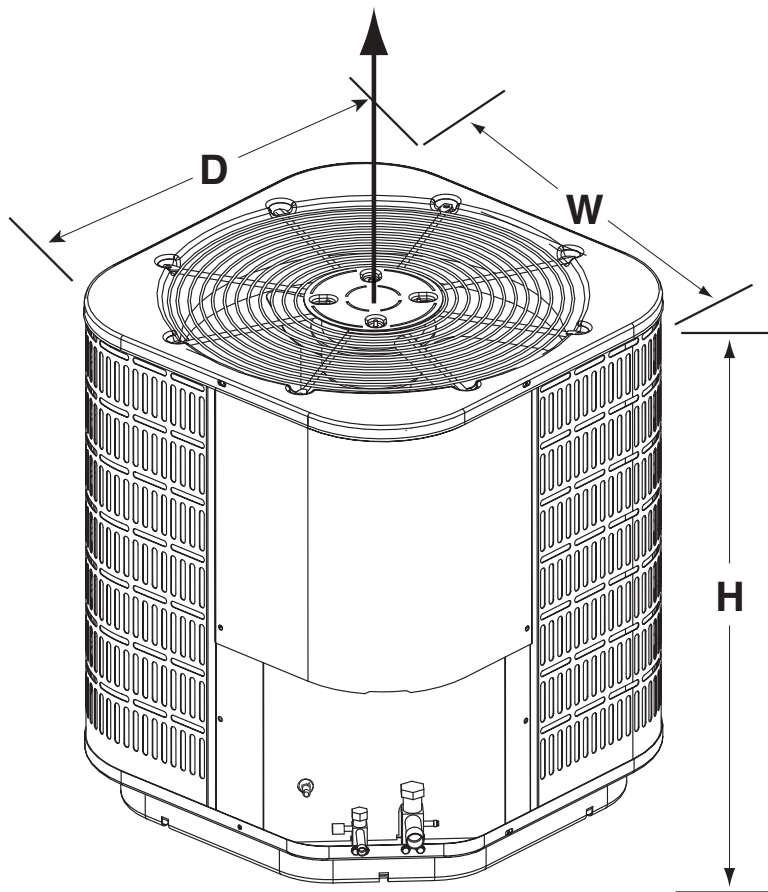

IDENTIFICATION CODE

D T 3 B C - 036 K A

D - Steel Guard™

T - Heat Pump

Generation 1, 2, 3, etc.

Product Identifier

BC = Braze 12 SEER

Design Series

Electrical Code

K = 208/230-60-1

Nominal Capacity
(000) BTU

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

12 SEER — Extra High Efficiency — Single Phase

Model No. DT3BC-		18KA	24K	30K	36K	42K	48K	60K	
Electrical	Volts-Cycles-Phase (1)	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	
Data	Total Amps	10.3	11.6	13.6	17.4	19.4	20.7	30.3	
	Delay Fuse Max. (2)	20	20	25	35	40	40	60	
	Min. Circuit Ampacity	12.6	14.2	16.6	21.4	23.9	25.5	37.5	
Component Data	Coil	Area	9.87	17.9	20.4	23.0	25.5	23.0	25.5
		Rows-FPI	1-18	1-18	1-18	1-20	1-20	2-16	2-16
		Tube Dia.	3/8 O.D.	3/8 O.D.	3/8 O.D.	3/8 O.D.	3/8 O.D.	3/8 O.D.	3/8 O.D.
	Fan Motor	Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC
		Amps	0.34	1.4	1.4	1.4	1.5	1.5	1.5
		Watts-HP	37 1/20	245	245	245	300	300	300
	Fan Blade	Dia.-#Blades	18 in. - 3	24 in. - 3	24 in. - 3	24 in. - 3	24 in. - 3	24 in. - 3	24 in. - 3
		SCFM	2000	3300	3300	3300	4000	4000	4000
	Compressor Data*	RLA	10.0	10.2	12.2	16.0	17.9	19.2	28.8
		LRA	42	56	67	88	104	137	169
Refrigerant Suction Line- Length/O.D. (Liq. Line)	15 - 24 ft.	5/8" (3)	5/8" (3)	3/4"	3/4"	3/4"	7/8"	7/8"	
	25 - 39 ft.	3/4"	3/4"	3/4"	3/4"	7/8" (4)	7/8"	1 1/8" (5)	
	All Lengths - 3/8" O.D.)	40 - 75 ft.	3/4"	3/4"	3/4"	7/8" (4)	7/8" (4)	7/8"	1 1/8" (5)
Refrigerant Charge	(Outdoor unit, Indoor Unit, 15' Line Set)	72	112	133	146	162	240	264	
Weight Approximate (lbs.)	Net	162	170	178	188	204	253	282	
	Ship	174	182	190	200	216	265	294	

* Values shown are most severe and may vary slightly depending on the make of the compressor supplied.

(1) Operating Voltage Range: 187v min. — 253v max.

(2) HACR Type Circuit Breakers or Time Delay Fuse

(3) Requires 3/4" to 5/8" reducer from unit to line.

(4) Requires 7/8" to 3/4" reducer from line to unit.

(5) Requires 7/8" to 1-1/8" reducer from line to unit.

COPPER WIRE SIZE — AWG (1% Voltage Drop)				
Supply Wire Length-Feet				Supply Circuit
200	150	100	50	Ampacity
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.

SYSTEM HEATING & COOLING CAPACITIES

12 SEER — Extra High Efficiency — Single Phase

Outdoor Unit	Indoor Unit							
Model Number DT3BC-	Model Number C3BA-	Cooling Btuh	SEER	Heating Btuh@47°	Heating Btuh@17°	HSPF	Nominal SCFM	Required Indoor Orifice
018KA	030C/U-A (2)	18,000	12.0	17,600	10,800	7.9	675	.053(1)
024K	036C/U-A (2)	24,000	12.0	22,400	12,800	7.2	700	.065(1)
024K	030C/U-B	24,000	12.0	22,400	12,800	7.2	700	.065(1)
030K	036C/U-A+TDR (2)	28,600	12.0	28,400	16,200	7.6	900	.067
030K	036C/U-B+TDR (2)	28,600	12.0	28,400	16,200	7.6	900	.067
036K	042C/U-B	34,600	12.0	34,600	19,700	7.6	1100	.077(1)
042K	048C/U-B+TDR (2)	40,500	12.0	40,500	23,100	7.6	1300	.085(1)
042K	048C/U-C+TDR	40,500	12.0	40,500	23,100	7.6	1300	.085(1)
048K	060C/U-C (2)	48,000	12.0	48,000	27,400	7.6	1600	.093
060K	060C-C+TDR (2)	57,000	12.0	57,000	32,800	7.6	1700	.099(1)

Outdoor Unit	Indoor Unit							
Model Number DT3BC-	Model Number B3B(M,V)-	Cooling Btuh	SEER	Heating Btuh@47°	Heating Btuh@17°	HSPF	Nominal SCFM	Required Indoor Orifice
018KA	030K-A	17,600	12.0	17,200	10,200	8.1	675	.053 (1)
024K	030K-A	24,000	12.0	22,400	12,800	7.2	700	.065 (1)
024K	030K-B	24,000	12.0	22,400	12,800	7.2	700	.065 (1)
030K	030K-A+TDR	28,600	12.0	28,400	16,200	7.6	900	.067 (1)
030K	036K-B+TDR	28,600	12.0	28,400	16,200	7.6	900	.067 (1)
036K	042K-B	34,600	12.0	34,600	19,700	7.6	1100	.077 (1)
042K	048K-B+TDR	40,500	12.0	40,500	23,100	7.6	1300	.085 (1)
048K	060K-C	48,000	12.0	48,000	27,400	7.6	1600	.093 (1)
060K	060K-C+TDR	57,500	12.0	58,000	32,800	7.6	1700	.099 (1)

13 SEER — (Rating for DT3BC with VSB or LLS)

Model Number DT3BC-	Model Number C3BA-	Cooling Capacity (Btu/h)	SEER Rating	Heating Capacity (Btu/h) @ 47°	HSPF	Heating Capacity (Btu/h) @ 17°	Nominal Airflow (SCFM)	Indoor Orifice Size (in)
018KA	030(C,U)-A/B+VSB	18,200	13.0	17,800	8.1	11,000	700	0.053 (1)
024K	036(C,U)-B+TDR+LLS	24,200	13.0	22,600	7.3	13,000	700	0.065 (1)
024K	030(C,U)-B+VSB	24,200	13.0	22,000	7.8	12,500	720	0.065 (1)
030K	042(C,U)-B+TDR+LLS	28,800	13.0	28,600	7.7	16,300	900	0.067 (1)
030K	036(C,U)-B+VSB	28,800	13.0	28,000	8.0	15,900	990	0.067
036K	042(C,U)-B+LLS+VSB	35,000	13.0	34,400	8.0	20,000	1,100	0.077 (1)
042K	048(C,U)-(B,C)+LLS+VSB	41,500	13.0	41,000	8.0	23,400	1,305	0.085 (1)
048K	060(C,U)-C+VSB	48,000	13.0	47,500	8.0	27,000	1,530	0.093

Model Number DT3BC-	Model Number B3VM-	Cooling Capacity (Btu/h)	SEER Rating	Heating Capacity (Btu/h) @ 47°		Heating Capacity (Btu/h) @ 17°	Nominal Airflow (SCFM)	Indoor Orifice Size (in)
018KA	030(C,U)-A/B	17,800	13.0	17,400	8.1	10,400	720	0.053 (1)
024K	036K-B	24,600	13.0	22,200	7.7	12,500	720	0.065 (1)
030K	036K-B	29,000	13.0	28,000	7.7	14,600	885	0.067
036K	048K-B+LLS	35,000	13.0	34,400	8.0	20,000	1,100	0.077 (1)
042K	048K-B	41,000	13.0	39,500	7.9	19,700	1,315	0.085 (1)
048K	060K-C	48,000	13.0	48,000	7.6	27,400	1,600	0.093

See the current ARI Directory for certified combinations and ratings.

(1) Field supplied.

(2) Available as C3BH multi-position

LLS = Liquid Line Solenoid

TDR = Time Delay Relay

VSB = Variable Speed Blower

ACCESSORIES - CONDENSING UNIT

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Snow Stand

Plastic-coated, molded wire stand which elevates units 7-1/4" above ground level.

913145 - (Large Base Pan) Shipped six (6) per box.

Outdoor Thermostat - 913852

Two-stage logic provides ability to lock out electric strips down to balance point and bring on in stages.

Fan Delay Kit (TDR) included in Maytag Furnace

911758 - 80-second fan delay

Liquid Line Solenoid Kit (LLS)

912650 - 1-1/2 – 3-1/2 Ton

913869 - 4 – 5 Ton



Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Maytag is a registered trademark of the Maytag Corporation and is used under license to NORDYNE Inc.

355B-0604 (Replaces 355B-0303)

Printed in U.S.A. (06/04)