

Ultra

Low NOx.

Gas Water Heaters Deliver
Unmatched Servicability and Dependability



engineered for life™



WATER HEATING

As the trusted leader in water heaters, Rheem® has revolutionized its tankless gas portfolio to offer a complete range of tankless solutions. You'll enjoy the comfort and convenience of continuous hot water while saving energy and money from the brand you trust. All tankless natural gas models meet 14 ng/J NOx requirements.

TANKLESS GAS WATER HEATERS



RHEEM® IKONIC® SUPER HIGH EFFICIENCY CONDENSING TANKLESS

- .96 UEF
- Built-in Recirculation pump for instant hot water at the tap (SR-Series)
- Maximum Altitude: 10,000 ft.
- Field gas convertible from natural gas to LP – conversion kit included
- Up to 11.2 gal / min. @ 35° F rise
- Up to 8.8 gal / min. @ 45° F rise

Limited Warranty

- Heat Exchanger – 15-years
- Parts – 5-years
- Labor – 1-year



SUPER HIGH EFFICIENCY CONDENSING

- Up to .93 UEF
- Single indoor/outdoor unit meets almost any installation need (Outdoor conversion kit sold separately)
- Natural gas and LP models
- Maximum Altitude: 7,800 ft.
- 9.5 gal./min. at 35° F rise
- 8.5 gal./min. at 45° F rise
- 11,000 – 199,900 BTU/h max.

Limited Warranty

- Heat Exchanger – 15-years
- Parts – 5-years
- Labor – 1-year



RHEEM® THERMAFORCE® SUPER HIGH EFFICIENCY CONDENSING TANKLESS

- .90 UEF
- Indoor direct vent models
- Field gas convertible from natural gas to LP
- Maximum Altitude: 10,100 ft.
- 9.5 gal./min. at 35° F rise
- 7.4 gal./min. at 45° F rise
- 28,500 – 199,900 BTU/h max.

Limited Warranty

- Heat Exchanger – 15-years
- Parts – 5-years
- Labor – 1-year



HIGH EFFICIENCY NON-CONDENSING TANKLESS

- Up to .82 UEF
- Indoor direct vent and outdoor models
- Natural gas and LP models
- Maximum Altitude: 7,800 ft.
- 9.5 gal./min. at 35° F rise
- 7.4 gal./min. at 45° F rise
- 11,000 – 199,900 BTU/h max.

Limited Warranty

- Heat Exchanger – 15-years
- Parts – 5-years
- Labor – 1-year

Rheem® ULN Water Heaters

As part of our commitment to leading the way with products that truly make a difference for the planet, we're focused on developing water heating products that meet regulatory requirements, reduce greenhouse gas emissions and environmental impacts while still delivering reliable performance. We took it beyond the basic requirements of efficiency regulations to design the best solution available and expanded our ultra low NOx line to meet California Air Quality Management Districts, Utah Air Quality board and Colorado Environmental Standards for Appliances requirements. At Rheem, we make it possible for our customers to trade up and protect the environment with zero tradeoffs between sustainability and performance.

SUPER HIGH EFFICIENCY RESIDENTIAL WATER HEATERS

Rheem super high efficiency gas water heaters provide homeowners with not only the comfort of hot water, but substantial energy savings and emission reduction. All models are ultra low NOx and are ENERGY STAR® certified.

RESIDENTIAL TANK-TYPE GAS | Professional *Prestige®*, *Classic Plus®* & *Classic®* Models



PRESTIGE MAXIMUS®

- Up to 3.8 GPM continuous flow of hot water at setpoint temperature
- Highest Delivery of 192 gallons in MaxMode™
- Meets 10 ng/J NOx requirements
- Built-in Condensate Neutralizer
- Built-in Wi-Fi powered by EcoNet® technology
- LeakSense™ Built-in leak detection system detects any leak, internal or external
- Certified to 10,000 ft. above sea level
- 50,000 - 100,000 BTU/h
- Natural Gas and LP models available

Limited Warranty

- Tank and Parts – 12-years



PRESTIGE MAXIMUS® HEAVY DUTY WITH LEAKSENSE™

- .88 UEF reduces operating cost
- Highest Delivery of 198 gallons in MaxMode™
- Meets 14 ng/J NOx requirements
- Built-in Condensate Neutralizer
- Built-in Wi-Fi powered by EcoNet® technology
- LeakSense™ Built-in leak detection system detects any leak, internal or external
- Certified to 10,000 ft. above sea level
- 100,000 BTU/h
- Natural Gas and LP models available

Limited Warranty

- Tank and Parts – 12-years




CLASSIC PLUS MAXIMUS®

- Up to .90 UEF
- Up to 95G First Hour Rating
- Meets 10 ng/J NOx requirements
- Recovery: Up to 64 GPH at a 90° F rise
- Built-in Condensate Neutralizer
- Certified to 10,000 ft. above sea level
- 50,000 BTU/h
- Natural Gas and LP models available

Limited Warranty

- Tank and Parts – 8-years

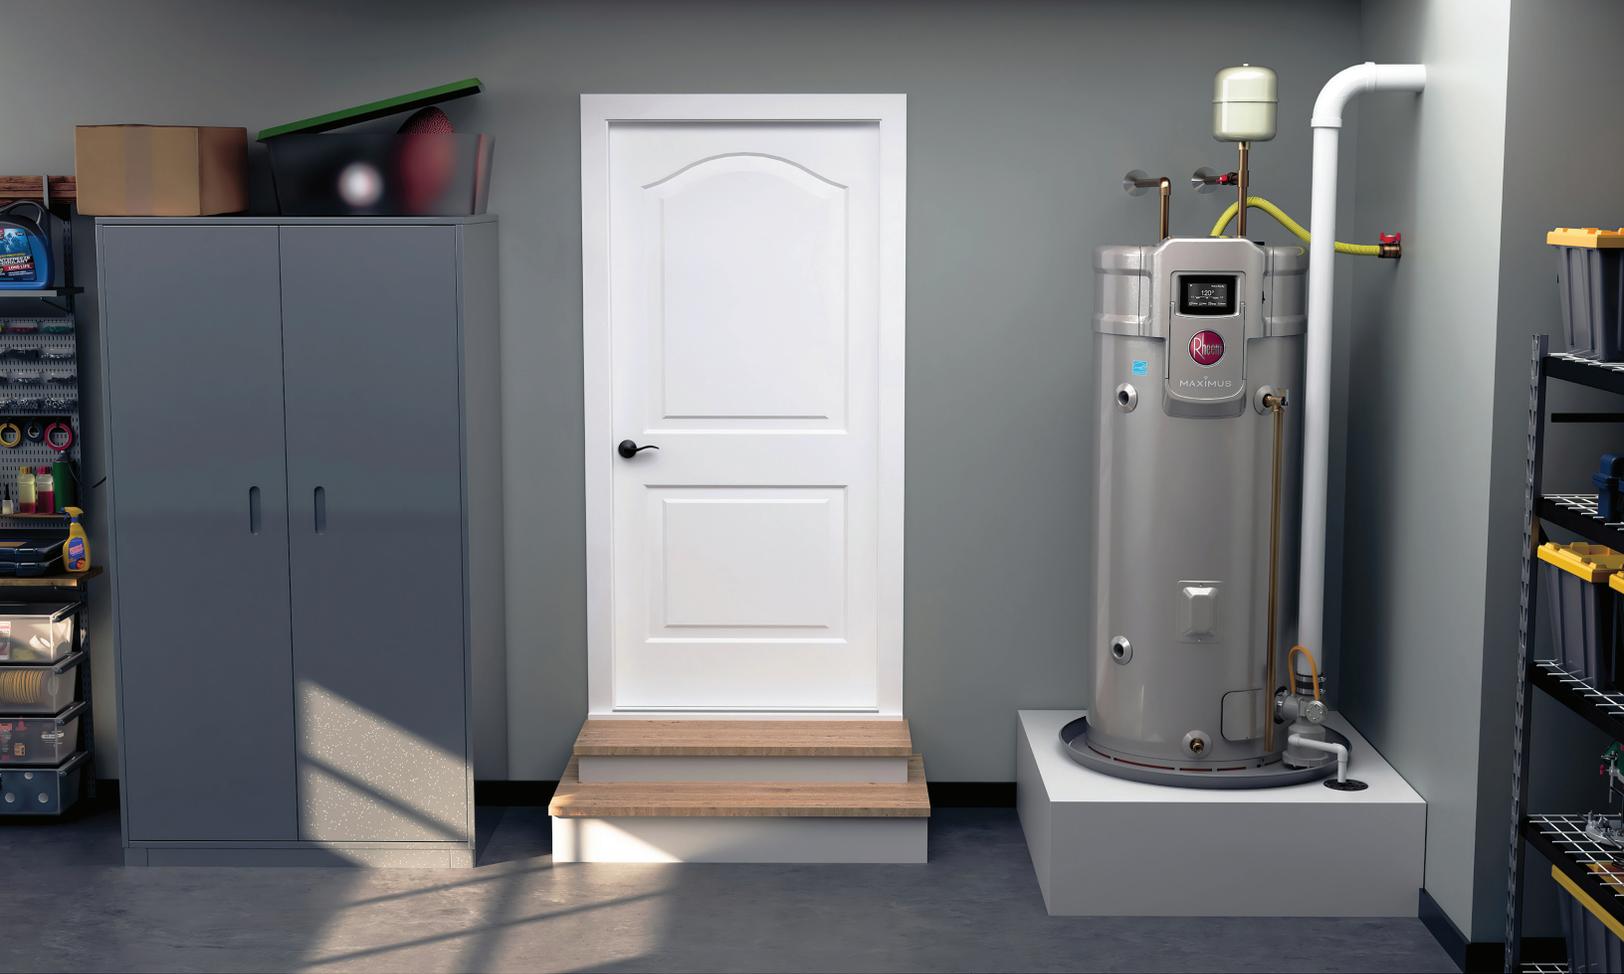

RESIDENTIAL TANK-TYPE GAS | Professional Prestige®, Classic Plus® & Classic® Models

Natural Gas Models



PRESTIGE POWERED DAMPER ULTRA LOW NOx

- .64 - .68 UEF
- Meets 10 ng/J NOx requirements
- Energy efficient damper design
- Integrated self-diagnostic system control, flammable vapor detection sensor
- Certified up to 5,400 ft above sea level
- 40 and 50-Gallon capacities
- Up to 38,000 BTU/h

Limited Warranty

- Tank and Parts – 12-years



CLASSIC PLUS POWERED DAMPER ULTRA LOW NOx

- .64 - .68 UEF
- Recovery rate: 38 GPH at a 90° F rise
- Meets 10 ng/J NOx requirements
- Energy efficient 24 VAC flue damper
- Certified to 5,250 feet above sea level
- 40 and 50-Gallon capacities
- Up to 38,000 BTU/h

Limited Warranty

- Tank and Parts – 8-years



CLASSIC PLUS ULTRA LOW NOx

- .58 - .64 UEF
- Recovery rate: 30 to 45 GPH at a 90° F rise, based on model
- Meets 10 ng/J NOx requirements
- Features the Guardian System
- Factory installed top T&P valve available on select models
- Certified up to 10,000 ft above sea level
- 29, 40, 50 and 55-Gallon capacities
- Up to 45,000 BTU/h

Limited Warranty

- Tank and Parts – 8-years



CLASSIC PLUS HEAVY DUTY ULTRA LOW NOx

- Recovery capacity: 72.8 - 77.6 GPH at a 90° F rise
- Meets 14 ng/J NOx requirements
- Features flammable detection system
- Certified up to 10,000 ft above sea level
- 75 and 98-Gallon capacities
- Up to 80,000 BTU/h

Limited Warranty

- Tank and Parts – 8-years



**CLASSIC HEAVY DUTY
ULTRA LOW NOx**

- Recovery: 72.8 GPH at a 90° F rise
- Meets 14 ng/J NOx requirements
- Features the Guardian System
- Certified up to 10,000 ft above sea level
- 75 and 98-Gallon capacities
- 75,100 BTU/h
- Enhanced-flow brass drain valve

Limited Warranty

- Tank and Parts – 6-years



**CLASSIC POWER VENT
ULTRA LOW NOx**

- .64 - .68 UEF
- Recovery rate: 36.4 to 38.4 GPH at a 90° F rise, based on model
- Meets 10 ng/J NOx requirements
- Long venting options up to 100 feet
- Whisper quiet blower
- Certified to 7,000 ft. above sea level; 10,199 ft. with kit
- 40 and 50-Gallon capacities
- Up to 38,000 BTU/h

Limited Warranty

- Tank and Parts – 6-years



CLASSIC ULTRA LOW NOx

- .58 - .64 UEF
- Recovery rate: 30 to 38 GPH at a 90° F rise, based on model
- Meets 10 ng/J NOx requirements
- Features the Guardian System
- Certified up to 10,000 ft above sea level
- Factory installed top T&P valve available on select models
- 29, 39, 40 and 50-Gallon capacities
- Up to 40,000 BTU/h

Limited Warranty

- Tank and Parts – 6-years

PROTECTIONPLUS®

**PROTECTIONPLUS®
WARRANTY EXTENSION KIT**

Why should you choose ProtectionPlus®?



ADVANTAGES

- Provides up to 135% additional anodic protection reducing corrosion
- Reduces corrosion and extends tank life
- Adds up-sale option to new tank installations

ProtectionPlus® is a 4-year warranty extension kit that can be added to new Rheem Water Heater installations

ProtectionPlus® Warranty Extension

6 Year Limited Tank Warranty Becomes **10**

8 Year Limited Tank Warranty Becomes **12**

PROTECTIONPLUS® kit includes high quality magnesium anode rod with plastic lined nipple (hot side), Plastic lined nipple (cold side) and brass 3/4" to 1" adaptor.

GUARDIAN SYSTEM™



Flammable Vapor Ignition Resistance

Guardian is the best-in-class FVIR System that's engineered to exceed ANSI standards.

Exclusive, Air Shut-Off System

It shuts off gas and air supplies – providing double protection.



Flame Arrestor Plate

A specially-designed flame arrestor prevents ignition of vapors outside the combustion chamber.

Superior Air Filtration

It prevents the flame arrestor from becoming clogged by lint, dust and oil.



Maintenance-Free! No Filters to Clean!

Guardian System has no filters to service, replace or clean.

Standard Replacement Parts

Guardian System incorporated a standard gas valve and Thermocouple – easy to replace.

It's Easy to Light

No matches are required with the Rheem Guardian System.

Plus...

- Guardian System models are high altitude compliant – some models certified for applications up to 6,000 and 10,200 feet above sea level
- Zero clearance to combustibles, rear and side
- Energy efficient – get more hot water at a lower operating cost
- Available on most Rheem gas water heater models

CONTACT US

Customer Service, Warranty, Parts	800.621.5622
Tankless Customer Service, Warranty, Parts.....	866.720.2076
Technical Service.....	800.HEATER3 (800.432.8373)
Technical Service for Heat Pump Water Heater	800.995.0982
EcoNet Support.....	800.255.2388
Fax.....	800.535.9538
Plumber Business Support	866.339.2388 PlumberBusinessSupport@Rheem.com
Website.....	Rheem.com

PARTS AND ACCESSORIES

Rheem offers a wide assortment of parts and accessories for all your water heating needs. For more information, see your Rheem Parts and Accessories Catalog, call **800.621.5622** or go to www.rheemparts.com.

LIMITED WARRANTY

See Rheem Warranty Certificate for complete information.



Introducing the Pro Partner® Plumbing Program

The Rheem Pro Partner® Plumbing Program recognizes and rewards plumbers like you for your superior dedication to the sale, installation, and servicing of our products. Built on plumber feedback and a philosophy of mutual success, this program seeks to provide the best loyalty experience in the industry.

Get Started exploring the benefits of being a Pro Partner Plumber now!

Visit My.Rheem.com>Marketing>Programs>Pro Partner Plumbing or ask your Rheem distributor for details



These product meets a stringent set of our internally defined sustainability standards.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.



engineered for **life™**

Rheem Water Heating
1115 Northmeadow Parkway, Suite 100
Roswell, Georgia 30076